Safety Critical Structures Data Package

Fluids and Combustion Facility Combustion Integrated Rack

Draft October 2, 2000

AUTHORIZED by CM when under FORMAL Configuration Control		
Date Signature		
10/24/00	/s/ Robert H. Van Niel	



Prepared For:

National Aeronautics and Space Administration John H. Glenn Research Center Microgravity Science Division Cleveland, Ohio 44135



Prepared By:

Federal Data Corporation Under Contract NAS3-99155 2001 Aerospace Parkway Brook Park, Ohio 44142



PREFACE

The National Aeronautics and Space Administration (NASA) is developing a modular, multiuser experimentation facility for conducting fluid physics and combustion science experiments in the microgravity environment of the International Space Station (ISS). This facility, called the Fluids and Combustion Facility (FCF), consists of three test platforms: the Fluids Integrated Rack (FIR), the Combustion Integrated Rack (CIR), and the Shared Accommodations Rack (SAR). This document presents a summary of the structural analysis conducted to support the CIR delta PDR. Earlier structural analysis conducted to support the CIR PDR is documented in CIR-RPT-0009, CIR Design Analysis Report.

At the time of first writing, some of the required analyses are incomplete or yet to be started. This document will be revised when the full set of analyses are complete.

SAFETY CRITICAL STRUCTURES DATA PACKAGE FOR THE FLUIDS AND COMBUSTION FACILITY COMBUSTION INTEGRATED RACK

Prepared By: <u>/s/ Timothy L. Sullivan</u> Date: <u>10/19/00</u>

Timothy L. Sullivan

Structural Analysis Lead, FCF

Common Systems
Analex Corporation

Reviewed By: /s/ Will Quinn Date: 10/19/00

Will Quinn

Manager, Product Assurance

Hernandez Engineering

Approved By: /s/ Jon Wetherholt Date: 10/19/00

Jon Wetherholt

Manager, Systems Engineering

Analex Corporation

SAFETY CRITICAL STRUCTURES DATA PACKAGE FOR THE FLUIDS AND COMBUSTION FACILITY COMBUSTION INTEGRATED RACK

Concurred By: /s/ Andrew M. Peddie Date: 10/23/00

Andrew M. Peddie
FCF Deputy Director
Federal Data Corporation

Concurred By: <u>/s/ Christopher J. Pestak</u>
Date: <u>10/23/00</u>

Christopher J. Pestak

FCF Director Analex Corporation

REVISION PAGE CIR SAFETY CRITICAL STRUCTURES DATA PACKAGE

Revision	Date	Description of Change or ECO's/ECP's Incorporated	Verification and Date
Draft	10/02/00	Initial	10/23/00

TABLE OF CONTENTS

1.0	INTRODUCTION	1
1.1	Purpose	
1.2	Scope	
1.3	Organization of document	1
2.0	DOCUMENTS	
2.1	Order of precedence for documents	
2.2	Applicable documents	3
2.3	Reference documents	3
3.0	SAFETY CRITICAL STRUCTURES	
3.1	CIR load paths.	4
4.0	CIR OPTICS BENCH	5
4.1	Analysis matrix	5
4.2	Design loads	6
4.3	Finite element model and analysis results	6
4.4	Safety critical and fracture critical parts list.	8
5.0	AIR THERMAL CONTROL UNIT (ATCU)	
5.1	Analysis matrix	
5.2	Design loads	
5.3	Finite element model and analysis results	
5.4	Safety critical and fracture critical parts list	11
6.0	INPUT/OUTPUT PROCESSOR (IOP)	
6.1	Analysis matrix	
6.2	Design loads	
6.3	Finite element model and analysis results	
6.4	Safety critical and fracture critical parts list	13
7.0	RACK CLOSURE DOOR (RCD)	
7.1	Analysis matrix	
7.2	Design loads	
7.3	Finite element model and analysis results.	
7.4	Safety critical and fracture critical parts list.	15
8.0	EPCU RAILS	
8.1	Analysis matrix	
8.2	Design loads.	
8.3	Finite element model and analysis results.	
8.4	Safety critical and fracture critical parts list.	18
9.0	ENVIRONMENTAL CONTROL SYSTEM (ECS)	
9.1	Analysis matrix	19

9.2	Design loads	19
9.3	Finite element model and analysis results	
9.4	Safety critical and fracture critical parts list	20
10.0	FASTENERS	21
10.1	Analysis matrix	21
10.2	Analysis results	21
10.3	Safety critical parts list.	22

LIST OF APPENDICES

APPENDIX A	Α	ACRONYMS AND ABBREVIATIONS	23
A.1			
A.2	List of	acronyms and abbreviations	23
APPENDIX I		DEFINITIONS	
B.1			
B.2	List of	definitions.	24
APPENDIX (С	TBD'S	25
C.1	Scope		25
C.2	List of	TBD's	25
APPENDIX I		SAFETY/FRACTURE CRITICAL PARTS LIST FOR THE CIR OPTICS BENCH	26
D.1		ist.	
APPENDIX I E.1		SAFETY/FRACTURE CRITICAL PARTS LIST FOR THE ATCU	
APPENDIX I	F	SAFETY/FRACTURE CRITICAL PARTS LIST FOR THE IOP	29
F.1	Parts I	ist	29
APPENDIX (G	SAFETY/FRACTURE CRITICAL PARTS LIST FOR THE RCD	32
G.1	Parts I	ist	32
APPENDIX I		SAFETY/FRACTURE CRITICAL PARTS LIST FOR THE EPCU BRACKETS	33
H.1	Parts I	ist	33
APPENDIX I		SAFETY/FRACTURE CRITICAL PARTS LIST FOR THE WTCU/GIS/FDSS	34
I.1		ist	

LIST OF TABLES

TABLE I.	CIR OPTICS BENCH ASSEMBLY STRESS ANALYSIS MATRIX 5
TABLE II.	CIR OPTICS BENCH MODAL ANALYSIS RESULTS6
TABLE III.	CIR OPTICS BENCH ASSEMBLY LAUNCH LOAD FACTORS6
TABLE IV.	ATCU ASSEMBLY STRESS ANALYSIS MATRIX9
TABLE V.	ATCU MODAL ANALYSIS RESULTS (PRELIMINARY)9
TABLE VI.	ATCU LAUNCH LOAD FACTORS (PRELIMINARY)9
TABLE VII.	IOP ASSEMBLY STRESS ANALYSIS MATRIX12
TABLE VIII.	IOP MODAL ANALYSIS RESULTS12
TABLE IX.	IOP LAUNCH LOAD FACTORS12
TABLE X.	RCD ASSEMBLY STRESS ANALYSIS MATRIX14
TABLE XI.	RCD MODAL ANALYSIS RESULTS14
TABLE XII.	RCD LAUNCH DESIGN LOAD FACTORS14
TABLE XIII.	EPCU RAILS STRESS ANALYSIS MATRIX16
TABLE XIV.	EPCU RAILS MODAL ANALYSIS RESULTS16
TABLE XV.	EPCU RAILS LAUNCH DESIGN LOAD FACTORS16
TABLE XVI.	WTCS, GIS AND FDSS PROBE STRESS ANALYSIS MATRIX 19
TABLE XVII.	WTCS, GIS AND FDSS PROBE LAUNCH DESIGN LOAD FACTORS19
TABLE XVIII.	GIS MODAL ANALYSIS RESULTS20
TABLE XIX.	CIR FASTENER STRESS ANALYSIS MATRIX21
TABLE XX.	TBD'S25

LIST OF FIGURES

FIGURE 1.	CIR load path diagram	4
FIGURE 2.	CIR Optics bench assembly finite element model	7
FIGURE 3.	Optics bench stress contour plot (cover plates removed)	7
FIGURE 4.	ATCU finite element model	10
FIGURE 5.	ATCU stress contour plot	10
FIGURE 6.	IOP finite element model	13
FIGURE 7.	IOP stress contour plot	13
FIGURE 8.	RCD finite element model	15
FIGURE 9.	RCD stress contour plot	15
FIGURE 10.	EPCU rails finite element model	17
FIGURE 11.	EPCU rails stress contour plot	17
FIGURE 12.	GIS finite element model	20

1.0 INTRODUCTION

1.1 Purpose.

The purpose of this document is to provide a summary of the analyses conducted to assure that all safety critical structures in the Combustion Integrated Rack (CIR) are safe to fly. It covers the development of finite element models (FEMs), derivation of design loads, and fracture, fatigue and stress analyses conducted to show positive margins of safety for all structure in the primary load path as well as for pressurized systems.

The analyses conducted are based on the interface requirements of SSP 57000 and the guidelines and requirements of SSP 52005. The structural design and verification criteria used in the development of FCF hardware are documented in FCF-PLN-0053.

1.2 Scope.

Included in this document is analysis of hardware unique to the CIR as well as hardware that are common to each FCF rack. The following is a list of the FCF subsystems that are included:

- CIR Optics Bench assembly
- Air Thermal Control Unit (ATCU) assembly
- Input/Output Processor (IOP) assembly
- Rack Closure Door (RCD) assembly
- Electric Power Control Unit (EPCU) rails and brackets
- Water Thermal Control System (WTCS)
- Gas Interface System (GIS)
- Fire Detection and Suppression System (FDSS) probe

Included with each subsystem are the brackets used to attach it to the International Standard Payload Rack (ISPR). The CIR Optics Bench portion of this document includes all components mounted on the Bench with the exception of the Combustion Chamber. Analysis of the Combustion Chamber is covered in CIR-RPT-0009. Also not covered in this document is Government Furnished Equipment (GFE). Included in this category are the EPCU, ISPR, Active Rack Isolation System (ARIS) and FDSS smoke detector. Analysis of the EPCU is the responsibility of Hamilton Sundstrand. Analysis of the FDSS smoke detector is the responsibility of Honeywell. Analyses of the ISPR and ARIS are the responsibility of Boeing.

Four of the subsystems identified above make up the Environmental Control System (ECS). They are the ATCU, WTCS, GIS and FDSS.

1.3 Organization of document.

During its lifetime, the CIR will be subjected to a variety of environments. These included the launch environment and the on-orbit environment. For much of the CIR hardware, launch is the design-driving environment. For many components subject to pressure loading during on-orbit

operation, this drives the structural design. Many CIR components will be packed in foam and stowed during launch. This will isolate them from high launch loads. Therefore, crew-induced loads may be design drivers for these components. A complete set of CIR design loads is documented in FCF-PLN-0053. Because launch loads require the inclusion of random vibration loading, the derived launch loads are documented here.

In this document each subsystem will have a separate Section except for ECS subsystems. Here, a subsystem is defined as a structure that has a direct interface with the ISPR posts. For ECS subsystems, there is a section for the ATCU and a section that combines the WTCS, GIS and FDSS probe. In each Section a matrix is provided to identify the part analyzed, the critical environment, status of analysis and minimum margins of safety (MS). The launch loads are presented as are the normal modes results on which the loads are based. If a finite element model has been created for analysis, it will be presented. Representative stress and fracture analysis results will be given. Finally, a list of safety critical and fracture critical parts will be provided. Because of the volume of parts for some subsystems, this section will point to an appendix that will contain the list.

Following the subsystem sections, a section devoted to generic types of structure such as fasteners will be presented.

2.0 DOCUMENTS

This section lists specifications, models, standards, guidelines, handbooks, and other special publications. These documents have been grouped into two categories: applicable documents and reference documents.

2.1 Order of precedence for documents.

In the event of a conflict between this document and other documents referenced herein, the requirements of this document shall apply. In the event of a conflict between this document and the contract, the contractual requirements shall take precedence over this document. All documents used, applicable or referenced, are to be the issues defined in the Configuration Management (CM) contract baseline. All document changes, issued after baseline establishment, shall be reviewed for impact on scope of work. If a change to an applicable document is determined to be effective, and contractually approved for implementation, the revision status will be updated in the CM contract baseline. The contract revision status of all applicable documents is available by accessing the CM database. Nothing in this document supersedes applicable laws and regulations unless a specific exemption has been obtained.

2.2 Applicable documents.

The documents in these paragraphs are applicable to the FCF Project to the extent specified herein.

SSP 52005	Payload Flight Equipment Requirements and Guidelines for Safety-Critical Structures
SSP 57000	Pressurized Payloads Interface Requirements Document

2.3 Reference documents.

The documents in this paragraph are provided only as reference material for background information and are not imposed as requirements.

CIR-RPT-0009	CIR Design Analysis Report	
FCF-PLN-0053	FCF Structural Design and Verification Plan	
FCF-PLN-0029	FCF Fastener Control Plan	
FCF-PLN-0030	FCF Fracture Control Plan	

3.0 SAFETY CRITICAL STRUCTURES

3.1 CIR load paths.

Safety critical structures are defined as those in the primary load path. Figure 1 shows the load paths for the components and subsystems that make up the Combustion Integrated Rack.

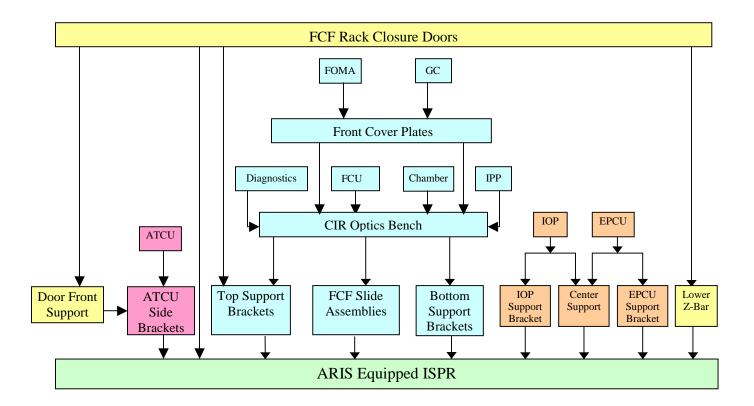


FIGURE 1. CIR load path diagram

4.0 CIR OPTICS BENCH

4.1 Analysis matrix.

The Optics Bench is the major structure in the CIR. It has many components mounted on it for Shuttle launch and many more are added once on-orbit for the conduct of combustion experiments. Table I presents the CIR Optics Bench assembly stress analysis matrix.

TABLE I. CIR Optics Bench assembly stress analysis matrix

Name of Component	Critical Design Environment	Status of Analysis	Minimum MS
Optics Bench (OB)	Launch	Complete	1.09 yield
Structure Rib			0.57 ultimate
OB Cover Plates	Launch	Complete	1.92 yield
			1.19 ultimate
OB to ISPR Upper	Launch	Complete	0.50 yield
Attach Brackets			0.11 ultimate
OB to ISPR Lower	Launch	Complete	0.65 yield
Attach Brackets			0.21 ultimate
FOMA Gas Supply	Pressure	Complete	Large
Manifold			
FOMA Exhaust	Pressure	Complete	Very Large
Manifold			
FOMA Vent Manifold	Pressure	Complete	Very Large
FOMA Manual Valve	Pressure		
Manifold			
FOMA Pump	Pressure		
GC Gas Supply	Pressure		
Manifold			
OB Deployment	Crew-induced		
Slides			
GC Instrumentation	Crew-induced		
Package			
FOMA Control Unit	Crew-induced		
IPP	Crew-induced		
FOMA Gas Bottle	Crew-induced		
Attachment			
Adsorber Cartridge	Crew-induced		
Attachment			
Diagnostic Instrument	Crew-induced		
Illumination Package	Crew-induced		
GC Gas Bottle	Crew-induced		
Attachment			

4.2 Design loads.

Launch loads for preliminary design are derived by combining quasistatic load factors provide by the Space Station Program in SSP 57000 with random vibration loads. Random vibration load factors are based on the natural frequencies of the subsystem and the random vibration environment provided by the Program in SSP 57000. Random vibration load factors are conservatively calculated using Miles' relationship. For the CIR Optics Bench, a mass weighted approach was used. Table II presents the modal data, while Table III presents the load factors used to assess the Optics Bench structure and its support brackets.

TABLE II. CIR Optics Bench modal analysis results

Mode	Direction*	Frequency, Hz.	Effective Mass Fraction
1	X	29.0	0.947
2	Z	53.0	.775
5	Y	114.3	.453
6	Y	142.6	.378

^{*} ISPR coordinate system

TABLE III. CIR Optics Bench assembly launch load factors

Case	X	Υ	Z
1	+10.3/-7.3	±11.6	± 9.9
2	± 7.7	±15.1	± 9.9
3	± 7.7	±11.6	±12.0

4.3 Finite element model and analysis results.

Figure 2 presents the Optics Bench assembly finite element model. For launch analysis the Combustion Chamber is represented as a flexible beam. Components mounted to the Optics Bench are modeled as rigid masses.

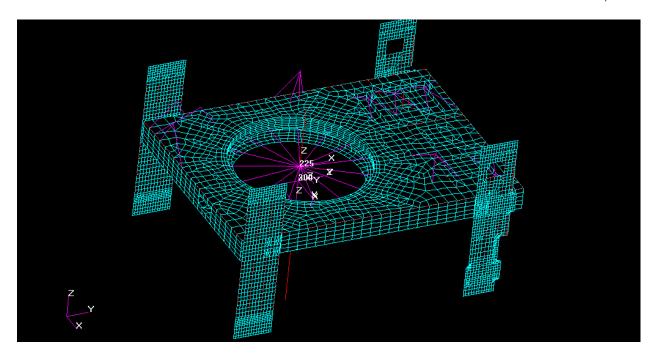



FIGURE 2. CIR Optics bench assembly finite element model



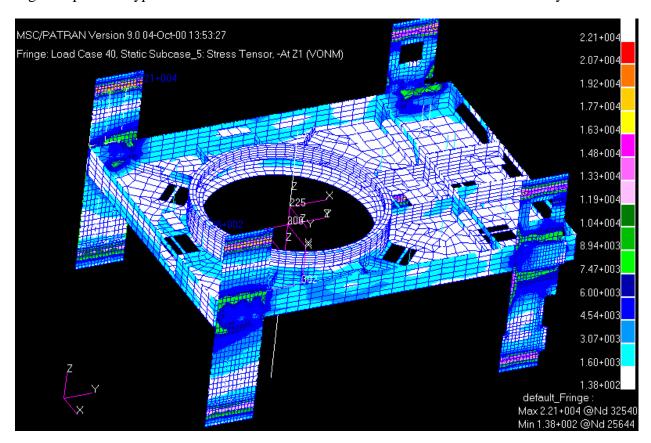


FIGURE 3. Optics bench stress contour plot (cover plates removed)

4.4 Safety critical and fracture critical parts list.

The safety critical and fractural critical parts list for the CIR Optics Bench assembly is presented in Appendix D.

5.0 AIR THERMAL CONTROL UNIT (ATCU)

Because of lack design maturity, results for the ATCU should be considered preliminary.

5.1 Analysis matrix.

TABLE IV. ATCU assembly stress analysis matrix

Name of Component	Critical Design Environment	Status of Analysis	Minimum MS

5.2 Design loads.

TABLE V. ATCU modal analysis results (preliminary)

Mode	Direction*	Frequency, Hz.	Effective Mass Fraction
2	Y	36.0	0.520
3	X	52.9	.909
5	Z	92.8	.414
7	Z	141.8	.279

^{*} ISPR coordinate system

TABLE VI. ATCU launch load factors (preliminary)

Case	Х	Υ	Z
1	±21.4	±11.6	± 9.9
2	± 7.7	±19.8	± 9.9
3	± 7.7	±11.6	±32.8

5.3 Finite element model and analysis results.

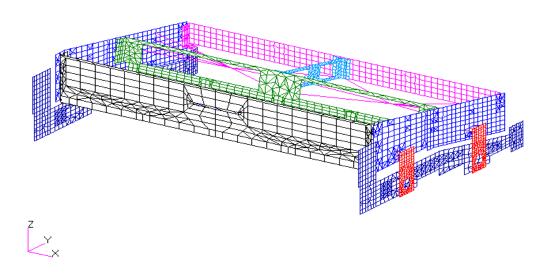


FIGURE 4. ATCU finite element model

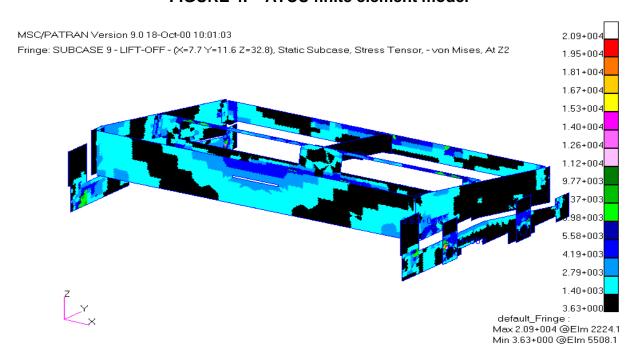


FIGURE 5. ATCU stress contour plot (preliminary)

5.4 Safety critical and fracture critical parts list.

The safety critical and fractural critical parts list for the ATCU assembly is presented in Appendix E.

6.0 INPUT/OUTPUT PROCESSOR (IOP)

6.1 Analysis matrix.

TABLE VII. IOP assembly stress analysis matrix

Name of Component	Critical Design Environment	Status of Analysis	Minimum MS
IOP Case	Launch	Complete	1.6 yield 0.95 ultimate
Front Attach Bracket	Launch	Complete	2.35 yield 1.5 ultimate
Rear Attach Bracket	Launch	Complete	3.15 yield 2.1 ultimate
Bull Nose Pin	Launch	Complete	Large
Handle	Crew Induced	Complete	7.4 yield 5.3 ultimate

6.2 Design loads.

TABLE VIII. IOP modal analysis results

Mode No.	Direction*	Frequency, Hz.	Modal Effective Mass
2	Z	74.9	0.161
6	X	158	.583
7	X	159	.073
17	Y	197	.182
24	Y	304	.130
24	Z	304	.179

^{*} ISPR coordinate system

TABLE IX. IOP launch load factors

Case	Х	Υ	Z
1	+20.3/-17.3	±11.6	± 9.9
2	± 7.7	±14.4	± 9.9
3	± 7.7	±11.6	±13.8

6.3 Finite element model and analysis results.

Figure 6 presents the IOP finite element model. The case and ISPR attachment brackets are represented in the model. Internal parts were modeled as rigid masses attached to the case.

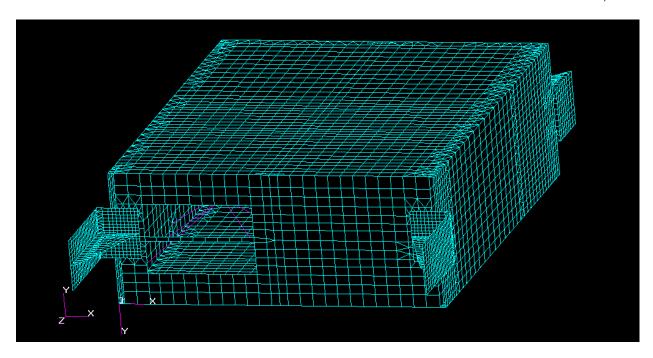



FIGURE 6. IOP finite element model



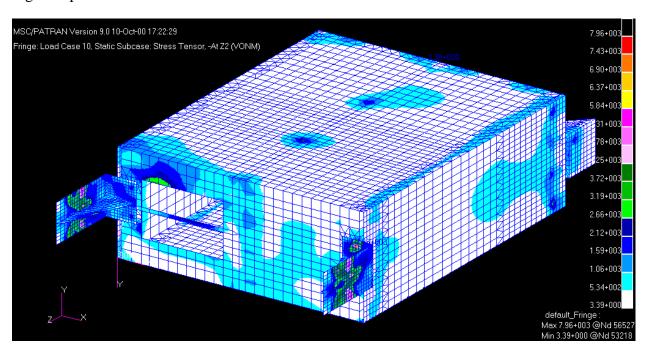


FIGURE 7. IOP stress contour plot

6.4 Safety critical and fracture critical parts list.

The safety critical and fractural critical parts list for the CIR IOP assembly is presented in Appendix F.

7.0 RACK CLOSURE DOOR (RCD)

7.1 Analysis matrix.

TABLE X. RCD assembly stress analysis matrix

Name of Component	Critical Design Environment	Status of Analysis	Minimum MS
Door Header			
Door Footer			
Upper Door Panel			
Lower Door Panel			
Adaptable Port Cover			

7.2 Design loads.

TABLE XI. RCD modal analysis results

Mode No.	Direction*	Frequency, Hz.	Modal Effective Mass
1	Y	39.1	0.374
3	Y	62.5	.124
4	Y	80.1	.074
7	Y	116	.065
14	Y	168	.067

^{*} ISPR coordinate system

TABLE XII. RCD launch design load factors

Case	Х	Υ	Z
1	+35.7/-32.7	±11.6	± 9.9
2	± 7.7	±23.0	± 9.9
3	± 7.7	±11.6	±35.0

7.3 Finite element model and analysis results.

Figure 8 presents the Rack Closure Door finite element model.

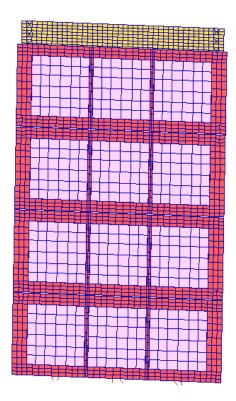


FIGURE 8. RCD finite element model

<TBD 07-01>

FIGURE 9. RCD stress contour plot

7.4 Safety critical and fracture critical parts list.

The safety critical and fractural critical parts list for the RCD assembly is presented in Appendix G.

8.0 EPCU RAILS

8.1 Analysis matrix.

TABLE XIII. EPCU rails stress analysis matrix

Name of Component	Critical Design Environment	Status of Analysis	Minimum MS
Rail	Launch		
Forward Bracket	Launch		
Rear Bracket	Launch		

8.2 Design loads.

TABLE XIV. EPCU rails modal analysis results

Mode	Direction*	Frequency, Hz.	Effective Mass Fraction
1	Y	83.4	0.276
2	X	84.9	.248
3	Y	104.8	.652
4	X	146.3	.727
5	Z	192.7	.933

^{*} ISPR coordinate system

TABLE XV. EPCU rails launch design load factors

Case	Х	Υ	Z
1	+16.1/-13.1	±11.6	± 9.9
2	± 7.7	±15.6	± 9.9
3	± 7.7	±11.6	±18.9

8.3 Finite element model and analysis results.

Figure 10 presents EPCU rails finite element model. The EPCU is represented as a rigid mass.

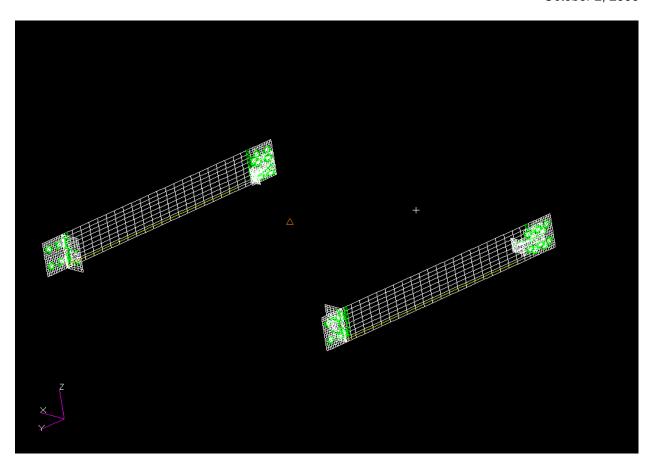


FIGURE 10. EPCU rails finite element model

Figure 11 presents stress contours for a representative load case.

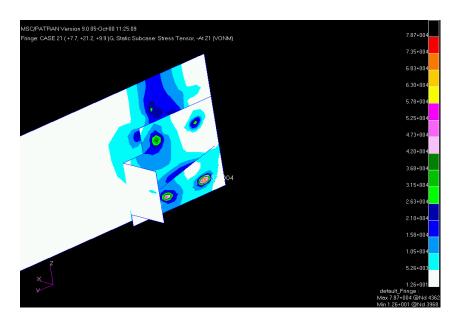


FIGURE 11. EPCU rails stress contour plot

8.4 Safety critical and fracture critical parts list.

The safety critical and fractural critical parts list for the EPCU rails is presented in Appendix H.

9.0 ENVIRONMENTAL CONTROL SYSTEM (ECS)

9.1 Analysis matrix.

This section covers the Environmental Control System (ECS) with the exception of the ATCU which was covered in Section 5.0.

TABLE XVI. WTCS, GIS and FDSS probe stress analysis matrix

Name of Component	Critical Design Environment	Status of Analysis	Minimum MS
WIP Cover &	Launch		
Stiffening Plate			
WFCA Brackets	Launch		
Accumulator	Launch		
Mounting Bracket			
GIS Pressure	Launch		
Regulator Bracket			
GIS Support Bracket	Launch		
Gas Interface Panel	Launch		
Gas Interface Panel	Launch		
Back Piece			
FDSS Probe Bracket	Launch		

9.2 Design loads.

Launch design loads for the WTCS, GIS and FDSS probe are based on the assumption of a natural frequency of 150 Hz. Loads based on that assumption are presented in Table XVII.

TABLE XVII. WTCS, GIS and FDSS probe launch design load factors

Case	Х	Υ	Z
1	+31.3/-28.3	±11.6	± 9.9
2	± 7.7	±31.3	± 9.9
3	± 7.7	±11.6	±30.7

9.3 Finite element model and analysis results.

Figure 12 presents the GIS finite element model. Structural assessment of the GIS for preliminary design is based on its natural frequency. The design goal for this structure was a minimum natural frequency of 150 Hz. Table XIX presents the GIS modal analysis results.

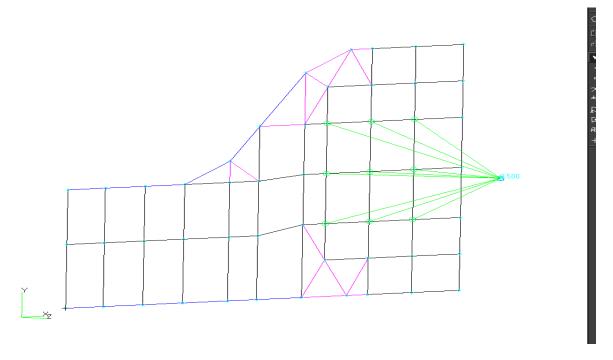


FIGURE 12. GIS finite element model

TABLE XVIII. GIS modal analysis results

Mode	Frequency, Hz.
1	141
2	184
3	515

9.4 Safety critical and fracture critical parts list.

The safety critical and fractural critical parts list for the WTCS, GIS and FDSS is presented in Appendix I.

10.0 FASTENERS

10.1 Analysis matrix.

Table XIX present the results of CIR fastener analysis.

TABLE XIX. CIR fastener stress analysis matrix

Component	Connection	Minimum MS
Combustion Chamber	Optics Bench	0.08 yield
		0.59 ultimate
FOMA Manifolds	Optics Bench	0.15 yield
		0.72 ultimate
Cover Plate	Optics Bench	0.08 yield
		0.17 ultimate
		3.47 joint separation
Optics Bench	Launch Bracket	0.22 yield
		0.61 ultimate
		6.1 joint separation
Launch Bracket	Rack Post	0.14 yield
		0.40 ultimate
		0.27 joint separation
ATCU Side Panel	Isolation Tab	
Isolation Tab	ATCU Rack Post Bracket	
ATCU Rack Post Bracket	Rack Post	
IOP Case	IOP Front Bracket	0.22 yield
		0.60 ultimate
IOP Card Cage	IOP Case	0.23 yield
		0.63 ultimate
IOP Front Bracket	Rack Post	0.36 yield
		0.75 ultimate
		3.0 joint separation
IOP Rear Bracket	Rack Post	0.36 yield
		0.76 ultimate
		3.8 joint separation
EPCU Case	EPCU Front Bracket	
EPCU Case	EPCU Rear Bracket	
EPCU Front Bracket	EPCU Rail	
EPCU Rear Bracket	EPCU Rail	
EPCU Rail	Rack Post	

10.2 Analysis results.

Because of redundancy, none of the fasteners used in the CIR are fracture critical.

10.3 Safety critical parts list.

The safety critical fasteners are included in the subsystem lists found in Appendices D through I.

APPENDIX A ACRONYMS AND ABBREVIATIONS

A.1 Scope.

This appendix lists the acronyms and abbreviations used in this document.

A.2 List of acronyms and abbreviations.

ARIS Active Rack Isolation System
ATCU Air Thermal Control Unit
CIR Combustion Integrated Rack
ECS Environmental Control System
EM Engineering Model (prototype)
EPCU Electric Power Control Unit
FCF Fluids and Combustion Facility

FDSS Fire Detection and Suppression System FOMA Fuel Oxidizer Management Assembly

GC Gas Chromatograph

GFE Government Furnished Equipment

GIS Gas Interface System
GRC Glenn Research Center
IOP Input/Output Processor
IPP Image Processing Package

ISPR International Standard Payload Rack

ISS International Space Station
MDP Maximum Design Pressure
MPLM Multi-Purpose Logistics Module

MS Margin of Safety RCD Rack Closure Door

RVLF Random Vibration Load Factor

SSP Space Station Program

STS Space Transportation System

TBD To Be Determined

WFCA Water Flow Control Assembly

WIP Water Interface Panel

WTCS Water Thermal Control System

APPENDIX B DEFINITIONS

B.1 Scope.

This appendix defines special terminology used in this document.

B.2 List of definitions.

Fracture-Critical Part - A classification of parts that assumes that fracture or failure of the part resulting from the occurrence of a crack will result in a catastrophic hazard.

Safety-Critical Part - All structural elements in the primary load path including pressure systems, uncontained glass, and rotating machinery are safety critical.

APPENDIX C TBD'S

C.1 Scope.

This appendix lists all items in this document that need to be determined (TBD).

C.2 List of TBD's.

TABLE XX. TBD's

TBD	Description	Document
Number		Paragraph
07-01	RCD stress contour plot	7.3
E-01	ATCU safety critical parts list	E.1
G-01	RCD safety critical parts list	G.1
H-01	EPCU safety critical parts list	H.1
I-01	WTCU, GIS & FDSS safety	I.1
	critical parts list	

APPENDIX D SAFETY/FRACTURE CRITICAL PARTS LIST FOR THE CIR OPTICS BENCH

D.1 Parts list.

This appendix documents safety critical and fracture critical parts for the CIR Optics Bench Assembly. The list is incomplete.

	OPTICS BENCH ASSEMBLY SAF	ETY CRITICAL STRUC	TURES (SCS) LIST
SCS#	STRUCTURE/CONNECTION	PART NUMBERS	QUANTITY	DISPOSITION
1	OPTICS PLATE ASSEMBLY	67212MELH150	1	
	Optics Bench Frame	67212MELH151	1	NFC-1
	Chamber Cover Plate	67212MELH152	1	NFC-1
	FOMA Left Cover Plate	67212MELH153	1	NFC-1
	FOMA Center Cover Plate	67212MELH154	1	NFC-1
	FOMA Right Cover Plate	67212MELH155	1	NFC-1
	FOMA Left Cover Plate fasteners	M6 x 15 SHCS	10	NFC-1
	FOMA Right Cover Plate fasteners	M6 x 15 SHCS	10	NFC-1
	FOMA Center Cover Plate fasteners	M6 x 15 SHCS	8	NFC-1
	Chamber Cover Plate fasteners	M6 x 15 SHCS	74	NFC-1
2	TEST CHAMBER ASSEMBLY	67212MELH200	1	
	Rear End Cap	67212MEDH251	1	FC
	Rear End Cap/Window Section Fasteners	M6 x 1 x 20 SHCS	40	NFC-1
	Rear End Cap Center Plug	67212MEDH257	1	NFC-1
	Rear End Cap Center Plug Fasteners	67212MEDH237		INFO-1
	Rear End Cap Port Plug	67212MEDH253	3	NFC-1
	Rear End Cap Port Plug Fasteners	67212MEDM318 (M5x1 S		INI C-1
	Fan Mount	01212WEDWS10 (WSX1 S	1	NFC-2
	Front End Cap	67212MEDH212	1	FC
	Chamber Arm (rotary)	67212MEDH213	1	NFC-1
	Chamber Arm (rotary) Fasteners	M8 x 1.25 x 12 BHSS	2	NFC-1
	Chamber Arm (rotary) Fasteners	M8 x 1.25 x 25 BHSS		NFC-1
	Chamber Arm (linear)	67212MEDH222	1	NFC-1
	Chamber Arm (linear)Fasteners	M4 x 0.7 x 22	8	NFC-1
	Guide Rail Fasteners	6-32 UNC-3a x 0.4375	12	NFC-1
	Window Section	67212MEDH201	1	FC
	Window Section/IRR Fasteners	M8 x 1.25 x 22 SHCS	40	NFC-1
	Window SectionAssembly	67212MEDH230	8	NFC-1
	Replaceable Window	67212MEDH233	8	FC
	Interface Resource Ring (IRR)	67212MEDH211	8	FC
	Lock Ring	67212MEDH204	1	FC
	Lock Ring Fasteners	0.2122511201	•	NFC-1
	Kaydon bearing	#15760001	1	FC
	Bearing Fasteners	M8 x 1.25 x 22 SHCS	36	NFC-1

FC: Fracture Critical NFC-1: Fail Safe NFC-2: Contained NFC-3: Restrained NFC-4: Low Mass

APPENDIX E SAFETY/FRACTURE CRITICAL PARTS LIST FOR THE ATCU

E.1 Parts list.

This appendix documents safety critical and fracture critical parts for the ATCU. The list is <TBD E-01>.

APPENDIX F SAFETY/FRACTURE CRITICAL PARTS LIST FOR THE IOP

F.1 Parts list.This appendix documents safety critical and fracture critical parts for the IOP.

SCS	Structure or Connection	Drawing No.	Disposition
Number			
1.1	Left/Right Front IOP-to-Rack Interface Brackets	?	NFC-1
1.2	Left/Right Rear IOP-to-Rack Interface Bullnose Pins	?	NFC-1
1.3	Left/Right Rack Interface Extrusions	?	NFC-1
1.4	Left/Right Front Rack Interface Receptacles	?	NFC-1
1.5	Left/Right Rear Rack Interface Receptacles	?	NFC-1
1.6	301 to 1.4, Front IOP Plate to Front Rack Interface Receptacles Connections	?	NFC-1
1.7	303 to 1.2, Rear IOP Plate to Bullnose Pins Connections	?	NFC-1
1.8	1.2 to Rear Rack, Bullnose Pins to Rear Rack Interface Receptacles Connections	?	NFC-1
1.9	1.4 to 1.3, Front Rack Interface Receptacles to Interface Extrusions Connections	?	NFC-1
1.10	1.5 to 1.3, Rear Rack Interface Receptacles to Interface Extrusions Connections	?	NFC-1
1.11	321 to 302/305, Power Supply to IOP Center Plate/Left Plate Connection	Screw_M5_BH_10MM Long	NFC-1
1.12	341 to 302/305, Fan to IOP Center Plate/Left Plate Connections	Screw_M5_BH_10MM Long	NFC-1
1.13	333/334 to 302/304, Cardcage Side Plates to IOP Center/Right Plate Connections	Screw_M5_BH_10MM Long	NFC-1
1.14	350 to 310, Hard Drive to IOP Frame Connection	Screw_M5_BH_10MM Long	NFC-1
1.15	306 to 310,Top Lid to IOP Frame Connections (M5 Screws)	Screw_M5_BH_10MM Long	NFC-1
1.16	307 to 310, Bottom Lid to IOP Frame Connections (M5 Screws)	Screw_M5_BH_10MM Long	NFC-1
1.17	306/307 to 310,Top/Bottom Lid to Front Frame Connections (M4 Screws)	Screw_M4_BH_7MM Long	NFC-1
1.18	Fiber Optic Transmitter/Receiver Mount	?	NFC-4
1.19	RTD Scandinavia Can Spider Mount	?	NFC-4
1.20	AMP 2X2 Fiber Optic Coupler Mount	?	NFC-4
1.21	Plate, Front – IOP	67212MFDB301	NFC-1
"	Threaded Insert	Keensert_M4x0.8	NFC-1
"	Threaded Insert	Keensert_KNCML_M5x0.8	NFC-1
1.22	Plate, Center – IOP	67212MFDB302	NFC-1
"	Threaded Insert	Keensert_KNCML_M5x0.8	NFC-1
1.23	Plate, Rear IOP	67212MFDB303	NFC-1
"	Threaded Insert	Keensert_KNCML_M5x0.8	NFC-1
1.24	Plate, Right – IOP	67212MFDB304	NFC-1
"	Threaded Insert	Keensert_KNCML_M5x0.8	NFC-1
1.25	Plate, Left – IOP	67212MFDB305	NFC-1
"	Threaded Insert	Keensert_KNCML_M5x0.8	NFC-1
1.26	Enclosure, Top Lid	67212MFDB306	NFC-1
1.27	Cap_Scr_	M5_47-91-501-60_Pres_In	NFC-1

SCS No.	Structure or Connection	Drawing No.	Disposition
1.28	Cap_Scr_	M4_47-91-301-22_Pres_In	NFC-1
1.29	Enclosure, Bottom Lid	67212MFDB307	NFC-1
1.30	Cover, Access - Cardcage	67212MFDB308	NFC-1
1.31	Cap_Scr_	M5_47-91-501-60_Pres_In	NFC-1
1.32	305 to 301, Left Plate to Front Plate Connection	Screw_M5_SH_10MM Long	NFC-1
1.33	305 to 303, Left Plate to Rear Plate Connection	Screw_M5_SH_10MM Long	NFC-1
1.34	304 to 301, Right Plate to Front Plate Connection	Screw_M5_SH_10MM Long	NFC-1
1.35	304 to 303, Right Plate to Rear Plate Connection	Screw_M5_SH_10MM Long	NFC-1
1.36	301 to 302, Front Plate to Center Plate Connection	Screw_M5_SH_10MM Long	NFC-1
1.37	303 to 302, Rear Plate to Center Plate Connection	Screw_M5_SH_10MM Long	NFC-1
1.38	Handle – IOP	67212MFDB311	NFC-4
1.39	311 to 301, Handle to Front Plate Connection	Screw_M5_BH_10MM Long	NFC-4
ıı	Threaded Insert	Keensert_KNCML_M5x0.8	NFC-4
	Assy – Cardcage	67212MFDB320	
1.40	321 to 322, Cardcage Top Plate to Side Plates	Screw_M5_BH_10MM Long	NFC-1
1.41	321 to 322, Cardcage Bottom Plate to Side Plates	Screw_M5_BH_10MM Long	NFC-1
1.42	Plate, Top & Bottom - Power Supply	67212MFDB321	NFC-1
1.43	Plate, Sides - Left and Right, Power Supply	67212MFDB322	NFC-1
ıı	Threaded Insert	Keensert_KNCML_M5x0.8	NFC-1
1.44	Plate, Mounting NBF150 - NB150S	67212MFDB323	NFC-4
1.45	Plate, Mounting NBF50 - NB50S	67212MFDB324	NFC-4
1.46	Plate, Mounting	?	NFC-4
1.47	Lid, IOP, Bottom Air Exit Plenum	?	NFC-1
1.48	Side, Air Exit Plenum	?	NFC-1
	Assy, Cardcage	67212MFDB330	
1.49	Plate, Front - Cardcage	67212MFDB331	NFC-1
ıı	Threaded Insert	Keensert_KNCML_M5x0.8	NFC-1
"	Threaded Insert	Keensert_KNCML25x045	NFC-1
1.50	Plate, Rear - Cardcage	67212MFDB332	NFC-1
II .	Threaded Insert	Keensert_KNCML_M5x0.8	NFC-1
"	Threaded Insert	Keensert_KNCML25x045	NFC-1
1.51	Plate, Side - Cardcage	67212MFDB333	NFC-1
1.52	Plate, Side - Cardcage	67212MFDB334	NFC-1
1.53	Angle, Support - Cardcage	67212MFDB335	NFC-1
1.54	333/334 to 331, Cardcage Side Plates to Front Plate Connection	Screw_M5_BH_10MM Long	NFC-1
1.55	333/334 to 332, Cardcage Side Plates to Rear Plate Connection	Screw_M5_BH_10MM Long	NFC-1
1.56	335 to 331/332, Cardcage Support Angles to Front and Rear Plate Connections	Screw_M5_BH_10MM Long	NFC-1
1.57	DC Fan	EBM-PAPST_4312-NGH	NFC-1
1.58	Plate, Mounting - DC Fan	67212MFDB341	NFC-1
"	Threaded Insert	Keensert KNCL0632L	NFC-1
1.59	1.57 to 341, Fan to Mounting Plate Connection	Screw_M3x12-7MM	NFC-1
1.60	Lower Right Bracket	67212MFDB351	NFC-1
1.61	Upper Right Bracket	67212MFDB352	NFC-1
1.62	Upper Left Bracket	67212MFDB353	NFC-1
1.63	Lower Left Bracket	67212MFDB354	NFC-1

SCS No.	Structure or Connection	Drawing No.	Disposition
1.64	Bracket Cover, Left - Upper & Lower	67212MFDB355	NFC-1
1.65	Bracket Cover, Upper Right	67212MFDB356	NFC-1
1.66	Top Cover, Pt. 1	67212MFDB357	NFC-1
1.67	Mounting Bracket - Pt. 2	67212MFDB358	NFC-1
1.68	Plate - Bottom Air Deflector	67212MFDB359	NFC-1
1.69	NBF150 EMI Filter	Commercial Part	NFC-4
1.70	NBF50 EMI Filter	Commercial Part	NFC-4
1.71	Disk Drive	Commercial Part	NFC-1
1.72	Screw	UNC0632_325_IN	NFC-1
1.73	Rivet	MS20470_AD3_7	NFC-1

Disposition Designations

FC -- Fracture Critical

LRFP -- Low Risk Fracture Part

NFC-1 -- Fail-Safe

NFC-2 -- Contained

NFC-3 -- Restrained

NFC-4 -- Low Mass

Note: None of the IOP parts are fracture-critical.

APPENDIX G SAFETY/FRACTURE CRITICAL PARTS LIST FOR THE RCD

G.1 Parts list.

This appendix documents safety critical and fracture critical parts for the RCD. The list is <TBD G-01>.

APPENDIX H SAFETY/FRACTURE CRITICAL PARTS LIST FOR THE EPCU BRACKETS

H.1 Parts list.

This appendix documents safety critical and fracture critical parts for the EPCU Rails. The list is <TBD H-01>.

APPENDIX I SAFETY/FRACTURE CRITICAL PARTS LIST FOR THE WTCU/GIS/FDSS

I.1 Parts list.

This appendix documents safety critical and fracture critical parts for the WTCU, GIS and FDSS. The list is <TBD I-01>.